

**Versatile Compact IN-GROUND FIXTURE**



**ZXG Series**  
**HK Lighting Group**


# Versatile Compact IN-GROUND FIXTURE

## ZXG Series

Compact at only 8" deep, yet fully adjustable for precise aiming, 360° horizontal and 30° vertical, The ZXG series takes life in the form of a cast brass housing and trim. Two Simple Captive Stainless Steel Fasteners secure the trim and make the unit watertight.



Encapsulated within the fixture can be a wide variety of today's most popular lighting sources including: MR16 Halogen, MR16 Metal Halide, Par 20 Halogen, Par 20 Metal Halide, and LED. With options including integral ballast/transformer, louvers, color filters, spread lenses, burial capability, drive over and other grate options, as well as the ease of relamping and adjusting beam spread and location, the ZXG series is truly an exceptional design.

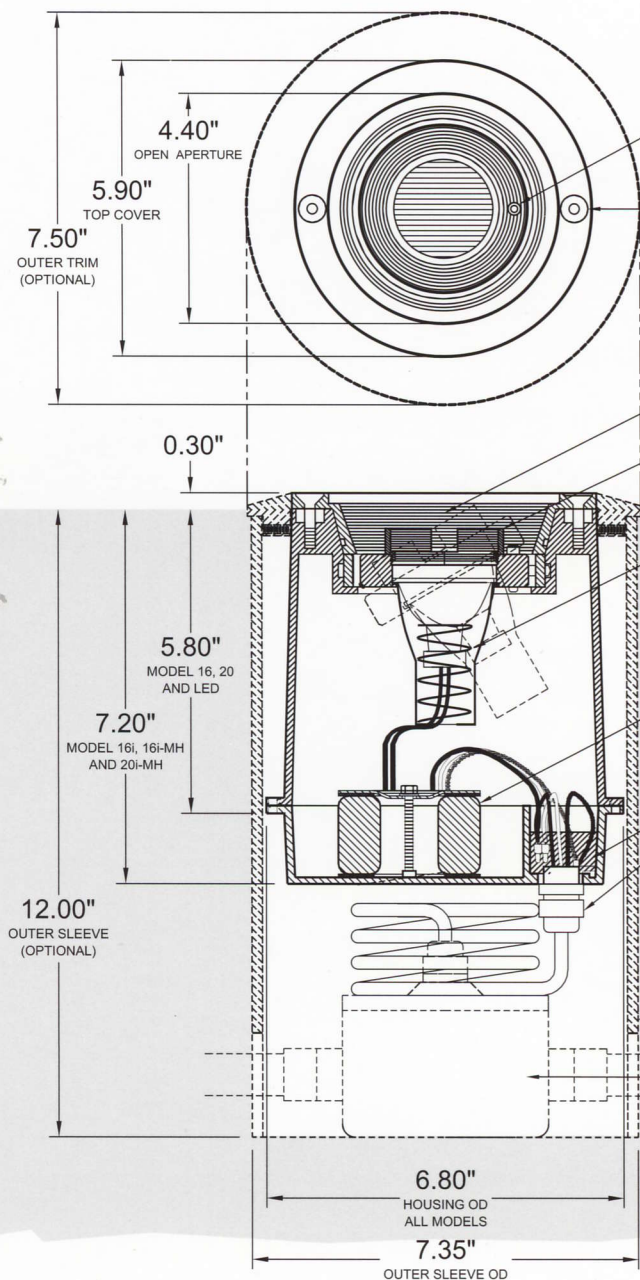

### EASY LOCK AIMING

Aim and lock with one screw.  
Range : 360° Horizontal and 30° from vertical.

### CAPTIVE STAINLESS STEEL SCREWS

Prevent loss of screws in the field.

### MATT BLACK BAFFLE

Provides quality glare control.

### ACCESSORY HOLDER

Secures lamp, additional lens, filters and louver in one quick action.

### LAMP SHROUD (MODEL ZXG16 & 16i only)

Eliminates light reflection from the back of MR16 lamp.  
Easy access for re-lamping by spring action.

### INTEGRAL CONTROL GEAR

Additional chamber for integrated transformer, ballast or LED power unit / driver.

### DOUBLE MOISTURE BLOCK

Combination of liquid tight fitting and potting resin blocks moisture penetration through primary wiring. Pre-wired with 10 ft. SJO type cable with seal tight connectors.

### OUTER SLEEVE (optional)

Pre-installation of Outer Sleeve allows easy 120 V installation, wiring and maintenance.


### J-BOX

Fittings and liquid tight conduit.  
(by Others)




## CONFIGURATIONS

Available in Cast Brass




### ZXG16

MR16 Halogen  
50/75 Watts  
12 Volts  
Remote Transformer  
30/360 Degrees

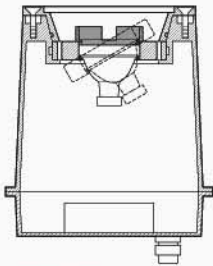


### ZXG16i

MR16 Halogen  
50 Watts  
120 Volts  
Integral Transformer  
30/360 Degrees

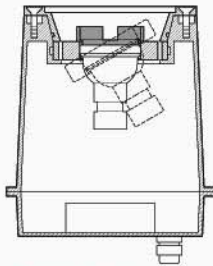


### ZXG16i-MH

MR16 Metal Halide  
20/39 Watts  
120/277 Volts  
Integral Ballast  
30/360 Degrees




### ZXG20

PAR20 Halogen  
50 Watts  
120 Volts  
N/A  
30/360 Degrees

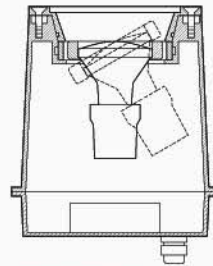

### ZXG20i-MH

PAR20 Metal Halide  
39 Watts  
120/277 Watts  
Integral Ballast  
30/360 Degrees




### ZXG-LED

LED  
18 Watts  
120 Volts or Specified  
Integral LED Driver  
30/360 Degrees


## BASIC APERTURE

## OPTIONAL TOP COVERS


For All Models




Open Aperture (OA)




Slit Aperture (SA)



Grate (CG)



Eyelid (EB)



Drive Over (DO)

## OPTIONAL ACCESSORIES

For All Models

### OPTICAL LENSES

### FILTERS

### LOUVERS



Linear Spread  
Lens (LSL)




Overall Spread  
Lens (OSL)



Solite Spread  
Lens (SO)



Dichroic Filter (DF)



Hex Louver (LV)